




电压/Main voltage: 3VDC、6VDC、9VDC、12VDC、24VDC

用途/Typical applications: 焊接机、垃圾处理器、咖啡机、印刷机、稳压机、碎纸机、输卡机、中央空调阀门、办公设备、家用设备、执行器  
 Central ari-conditioning valve, Amusement equipment, Coinrefund devices, Grill, Oven, Peristaltic pumps, ATM bank automatic system, Robot, Medical equipment, Office equeipment, Household appliances, Automatic actuator.

重量/Weight: 650~700g/pcs(approx)

包装外形尺寸/Packing details: CTN size: 55X35XH18cm 24pcs/CTN G.W.18kgs

外形尺寸 APPEARANCE SIZE

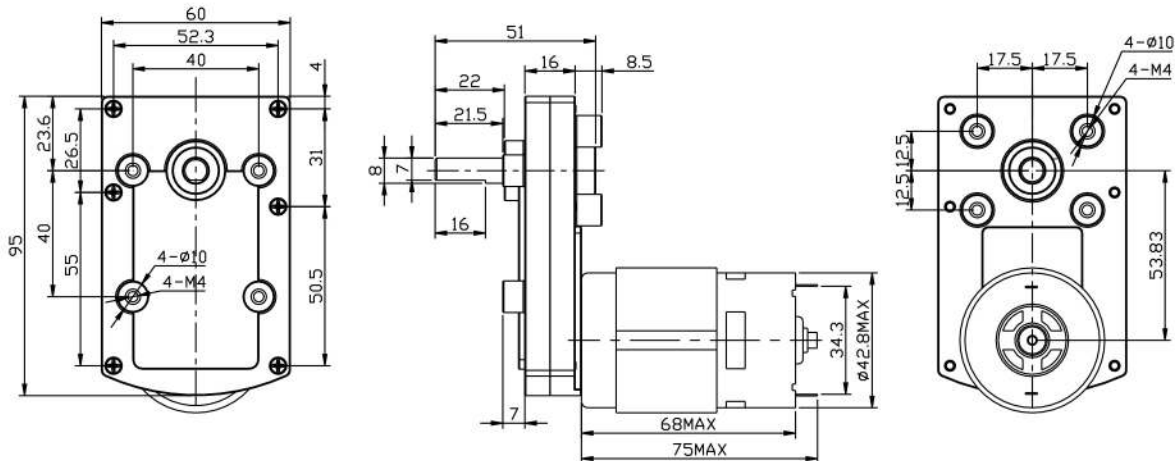

齿轮箱数据 Gearbox data

减速箱级数 Number of stages	3 减速比 Stages reduction	4 减速比 Stages reduction	5 减速比 Stages reduction
减速比 Reduction ratio	36、66、 <b>94</b>	149、196、211、277、394	624、830、1166
最大运转力矩 Max. Running torque	5kgf.cm	20kgf.cm	50kgf.cm
最大破坏力矩 Max. Gear breking torque	30kgf.cm	60kgf.cm	150kgf.cm
最高齿轮效率 Max. Gearing efficiency	73%	65%	59%

其它减速比请致电或邮件给我司技术部 Other reduction ratio please telephone or e-mail to our engineering department.

马达参数 Motor data

马达型号 Motor Model	电 压 Rated Volt. V	空 载 No load		负 载 Load torque				堵 转 Stall torque	
		电 流 Current	转 速 Speed	电 流 Current	转 速 Speed	扭 矩 Torque	输出功率 Output power	扭 矩 Torque	电 流 Current
		mA	r/min	mA	r/min	gf.cm	W	gf.cm	A
TT-775123000	12	≤420	3000	≤1300	2430	408	10.4	2484	6.7
TT-775124500	12	≤750	4500	≤2100	3710	476	17.6	2714	10.4
TT-775126000	12	≤1300	6000	≤3500	5195	478	25.5	3129	18.6
TT-775243000	24	≤210	3000	≤600	2590	364	9.87	2050	3.2
TT-775244500	24	≤480	4500	≤1300	3850	482	18.5	3335	5.3
TT-775246000	24	≤630	6000	≤2100	5233	574	30.8	4565	12.1

- 马达和齿轮箱装配成减速电机后输出扭矩 = 马达扭矩X减速比X齿轮效率;输出转速 = 马达转速 / 减速比 .
- After connecting motor and gearbox which is named gearmotor the output torque: motor torque X reduction ratio X gearing efficiency; output speed: motor speed/reduction ratio .