


Drawing NO.	PG45C369K755Y2433-138Y	Model No.	PG45755243300-369K	Voltage	24 DC
-------------	------------------------	-----------	--------------------	---------	-------

Drawing 版次: 1.0



注: 1.引线长540mm;  
 2.插脚1接“+”, 插脚2接“-”, 电机输出旋转方向CW;  
 3.马达引线出口对应的方形盖板上无缺口.

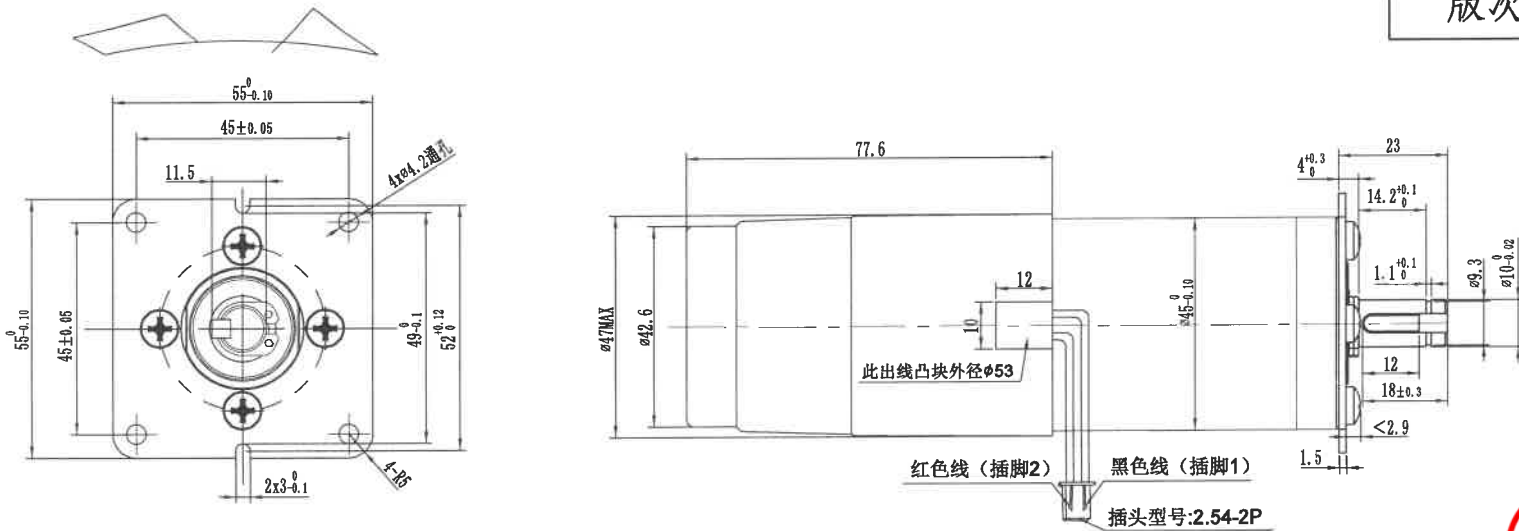

客户确认 (Customer APP.):

Details	Geared motor specification		商 标 NO. 1 2 3 4 5 6	备注 方形板安装孔为通孔 (TRL45-005)。
	No Load Current(A)	≤ 0.300		
	No Load Speed(r.p.m)	8.9 ± 10%		
	Rated Load Torque(kgf.cm)	80		
	Rated Current(A)	≤ 0.750		
	Rated Load Speed(r.p.m)	7.1 ± 10%		
	Stall Current(A)			
	Stall Torque(kgf.cm)			
Rotation Direction	CW			
Remarks				

Draw	王松 20.12.3	Rev	12.3	App.	许国明 20.12.3
------	------------	-----	------	------	-------------